


HM Chip Tools v3.0 updating procedure


1. Download the software and data pack from www.hot-vapor.com




2. Uncompress the HM Chip Tools V2.0.rar

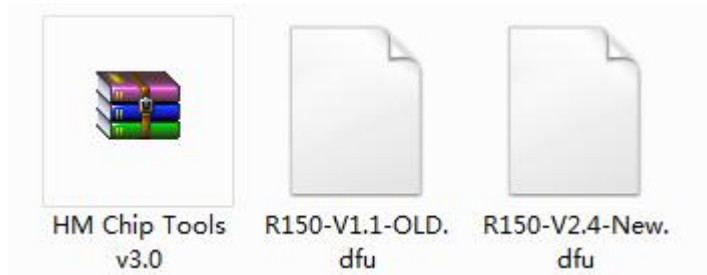


3. Open the folder, double click the HM Chip Tools.exe

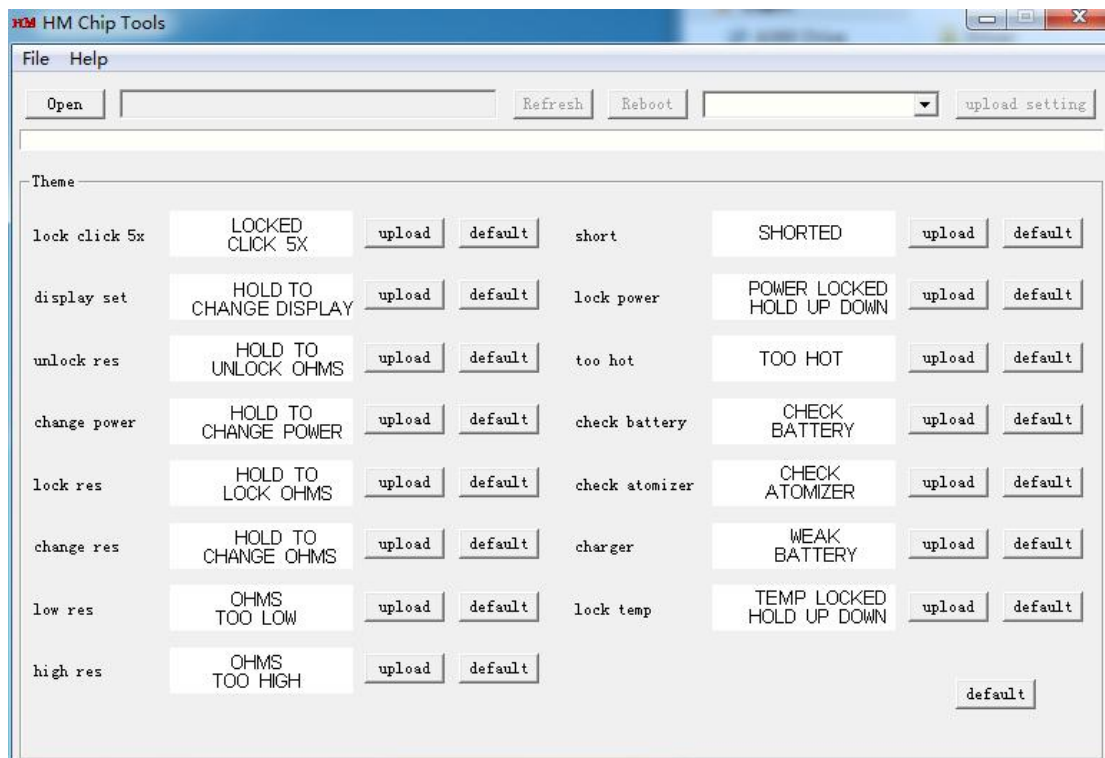

4. Click the "open" button to choose updater

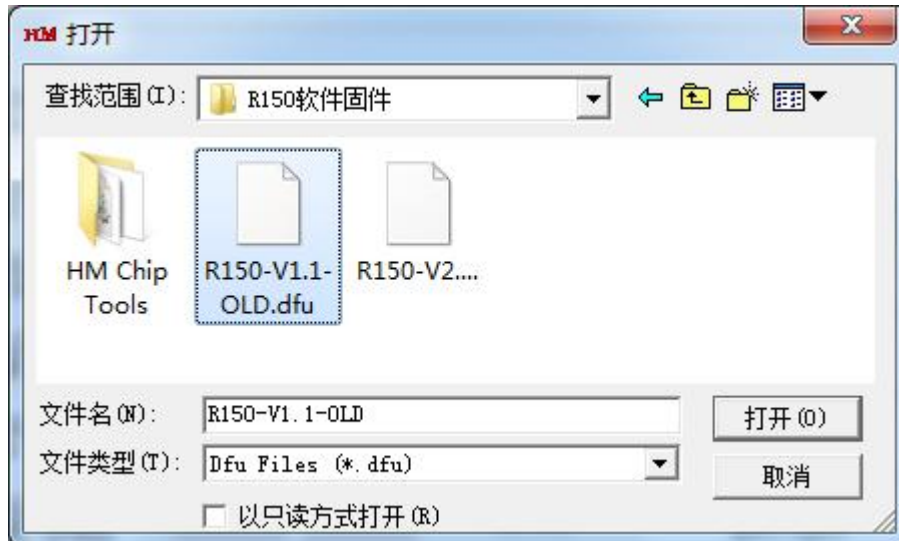


Please choose the update file according to the production date. Batches produced before Oct.2016 please choose V1.1, batches produced after Oct. please choose V2.4. Please contact with Bennett@hotcig.net if there is anything unclear.

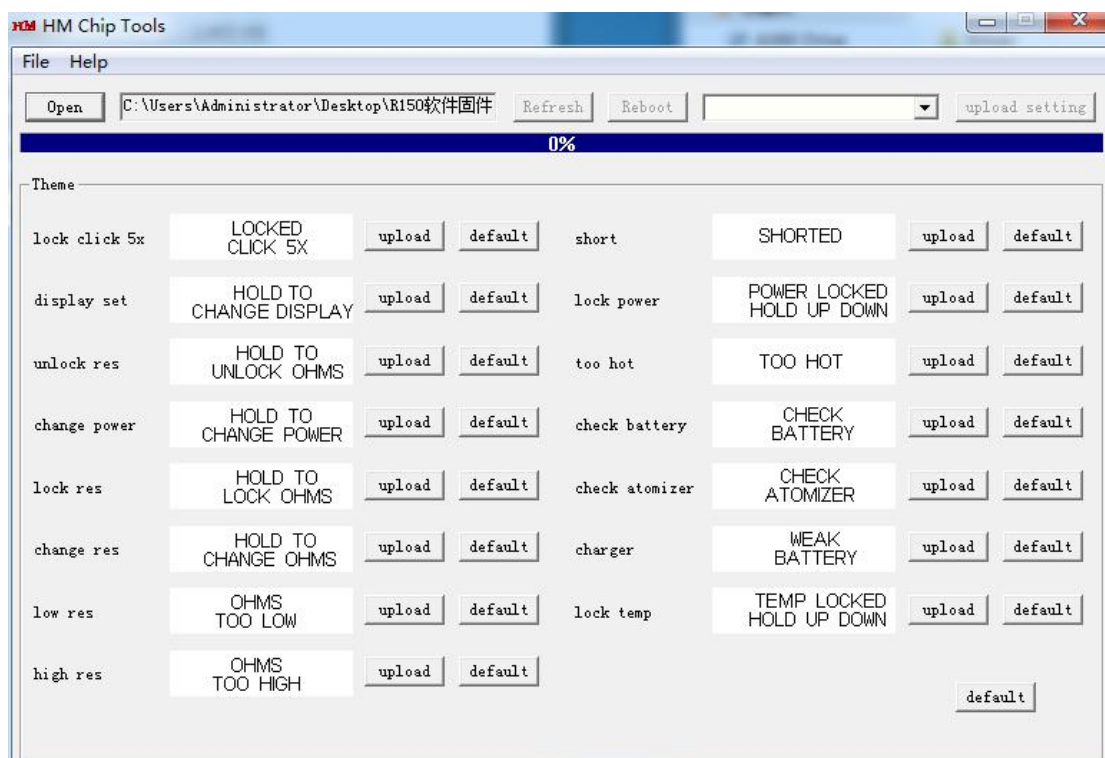


5. Switch your mod to LINK model (remove the battery— hold the “+” and “-” – connect to the computer by USB)

PS: If the antivirus program blocks access to the computer, please close the software or authorize to visit.

6. You will see it showed as below after connected:

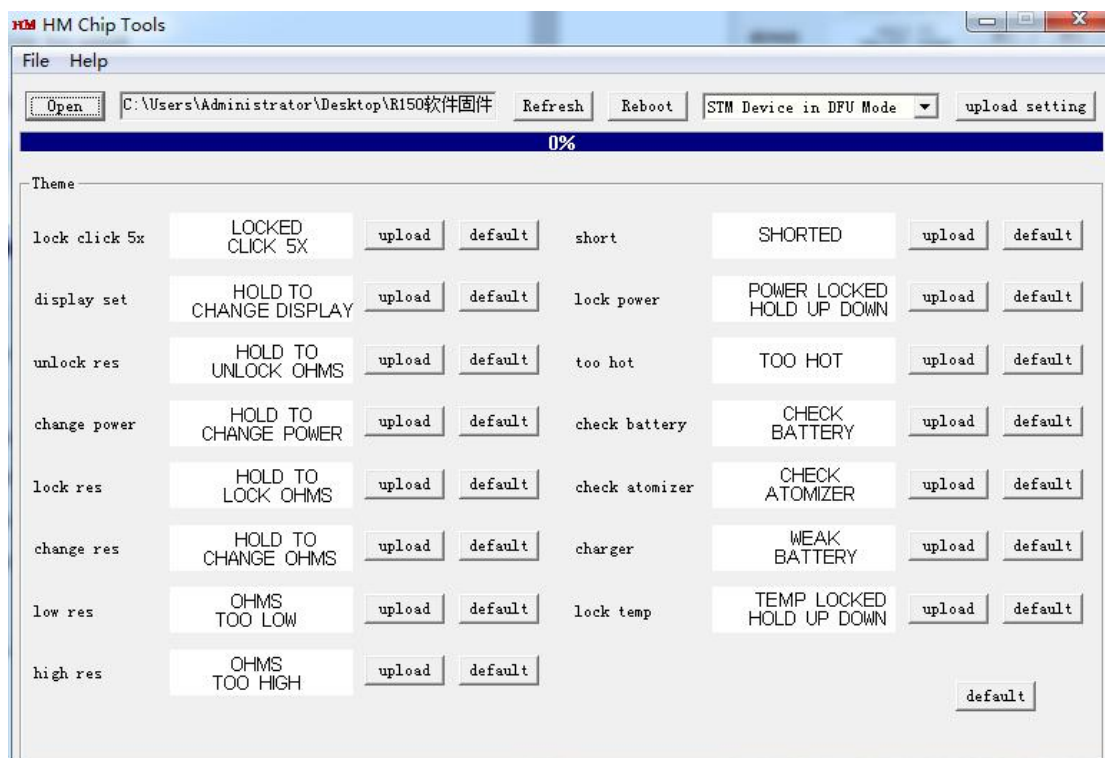


7. Click “ Refresh”

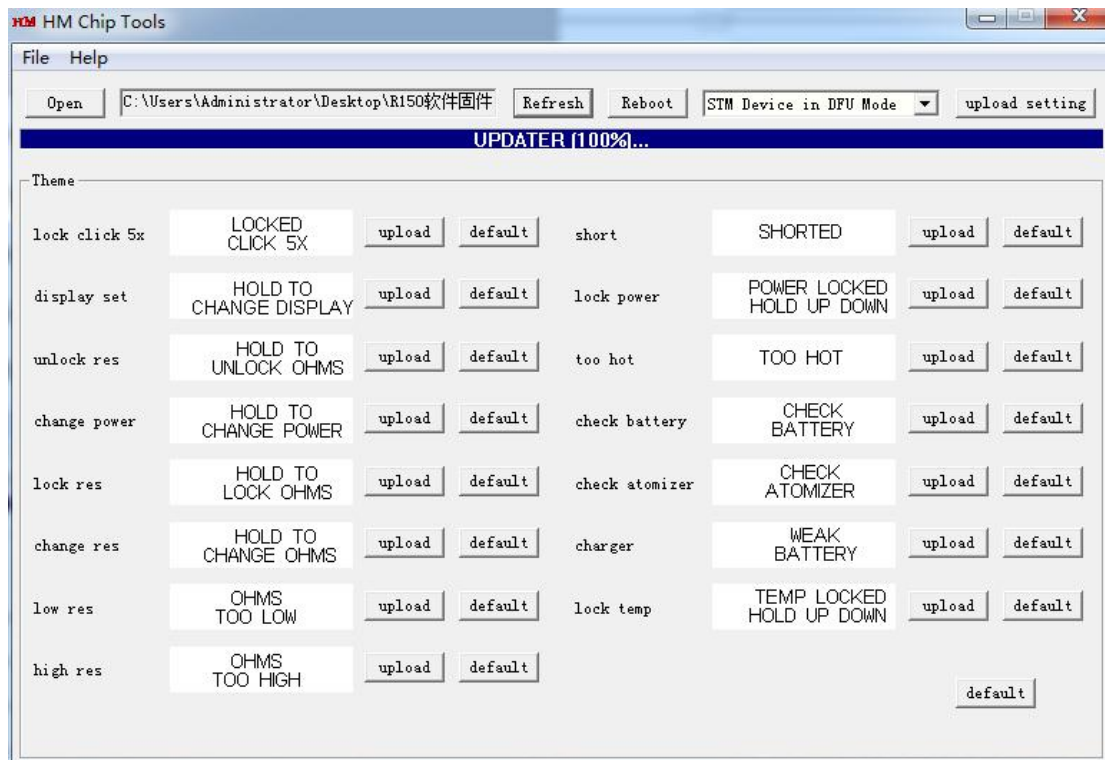

Please DO NOT disconnect the USB when the refresh completed


Click “upload setting” to complete the refresh, click “reboot” to complete the update

8.Click “upload ” to change the settings of Themes

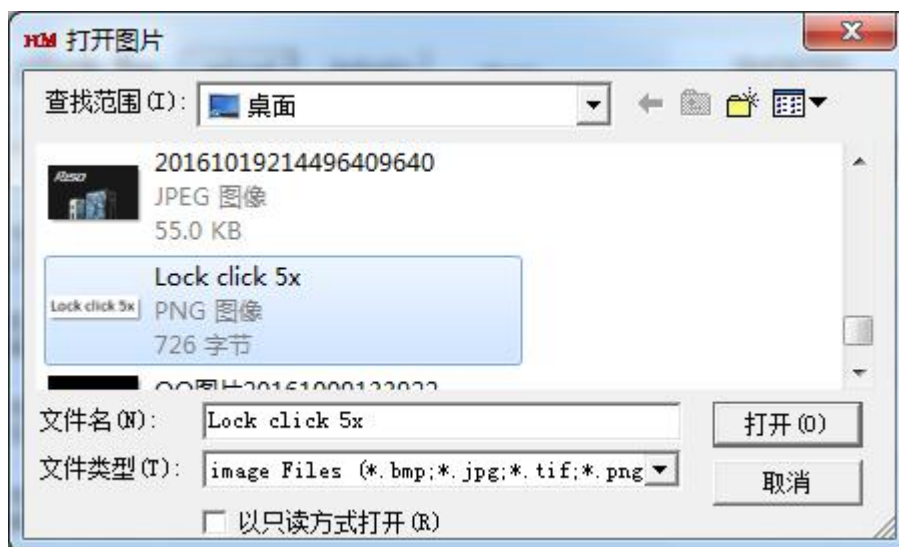

Choose the picture(ps: the pixel should be 128 x 32 with

white background and black text.

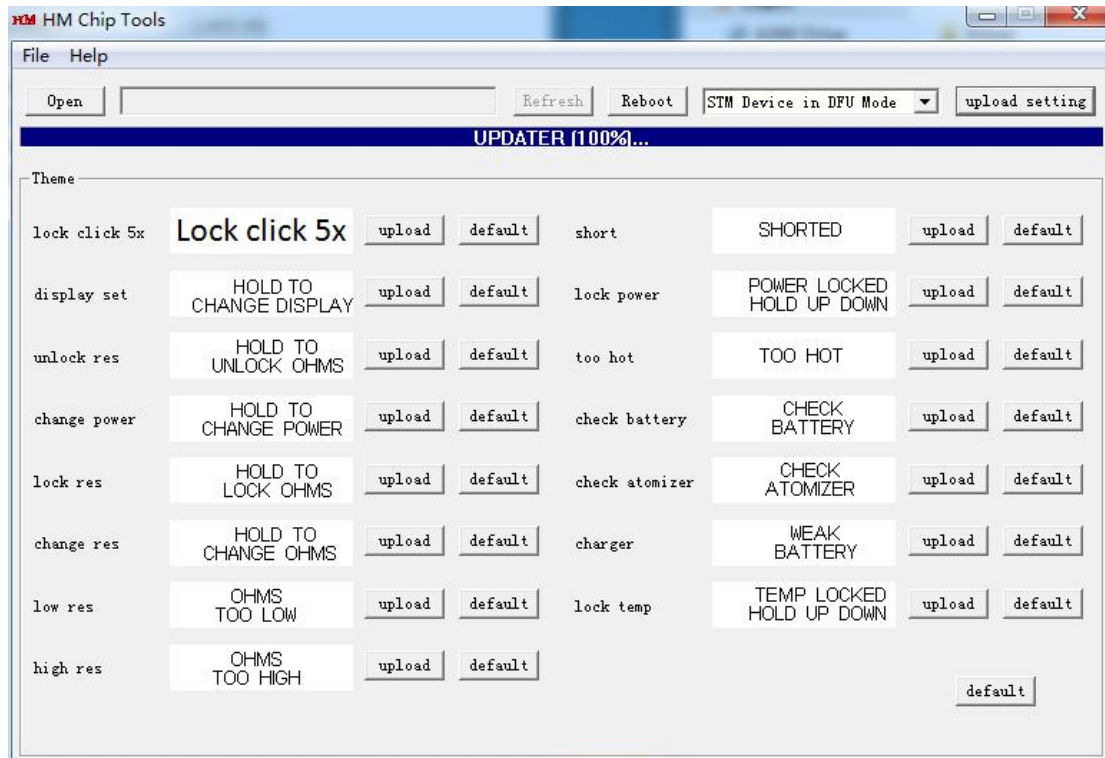

Click "upload setting" to complete